



100X Float Ball Valve



Specifications



Basic standard
● Flange end: BS4504
Feature
● Nominal pressure (MPa): 1.6 ● Seal test(water): 1.8MPa ● Shell test(water): 2.4MPa ● Suitable temperature: 0~80℃ ● Suitable medium: water

Main parts and materials



Part Name	Material
Body	Ductile Iron
Bonnet	Ductile Iron
Stem	2Cr13
Diaphragm Clamp	Cast Iron
Diaphragm	Rubber
Flat Gasket G	Q235A
Disc	Cast Iron

Dimensions

DN	L	Φ	Φ1	Φ2	N×Φ3
50	203	99	125	165	4×Φ19
65	216	118	145	185	4×Φ19
80	241	132	160	200	8×Φ19
100	292	156	180	220	8×Φ19
125	330	184	210	250	8×Φ19
150	356	211	240	285	8×Φ23
200	458	266	295	340	12×Φ23
250	530	319	355	405	12×Φ28

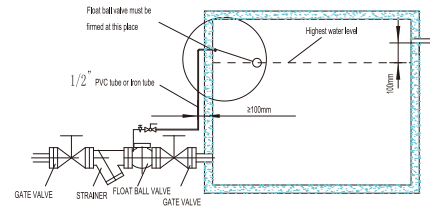

200X Pressure Reducing Valve



Specifications


Basic standard
● Flange end: BS4504
Feature
● Nominal pressure (MPa): 1.6 ● Seal test(water): 1.8MPa ● Shell test(water): 2.4MPa ● Suitable temperature: 0~80℃ ● Suitable medium: water

Main parts and materials

Part Name	Material
Body	Ductile Iron
Bonnet	Ductile Iron
Stem	2Cr13
Pressure Reducing Valve	Brass/304
Needle Valve	Brass/304
Ball Valve	Brass/304



Dimensions

DN	L	Φ	Φ1	Φ2	N×Φ3
50	203	99	125	165	4×Φ19
65	216	118	145	185	4×Φ19
80	241	132	160	200	8×Φ19
100	292	156	180	220	8×Φ19
125	330	184	210	250	8×Φ19
150	356	211	240	285	8×Φ23
200	458	266	295	340	12×Φ23
250	530	319	355	405	12×Φ28



1、4、5-GATE VALVE
2、STRAINER
3、PRESSURE REDUCING VALVE

300X Slowly Closing Silencing Check Valve



Specifications


Basic standard
● Flange end: BS4504
Feature
● Nominal pressure (MPa): 1.6 ● Seal test: 1.8MPa ● Shell test: 2.4MPa ● Suitable temperature: 0~80℃ ● Suitable medium: water

Main parts and materials


Part Name	Material
Body	Ductile Iron
Bonnet	Ductile Iron
Stem	2Cr13
Disc	Cast Iron
Ball Valve	Brass/304
Check Valve	Brass/304

Dimensions

DN	L	Φ	Φ1	Φ2	N×Φ3
50	203	99	125	165	4×Φ19
65	216	118	145	185	4×Φ19
80	241	132	160	200	8×Φ19
100	292	156	180	220	8×Φ19
125	330	184	210	250	8×Φ19
150	356	211	240	285	8×Φ23
200	458	266	295	340	12×Φ23
250	530	319	355	405	12×Φ28

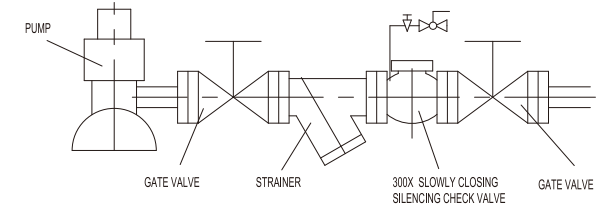

400X Flux Control Valve



Specifications

Basic standard
● Flange end: BS4504
Feature
● Nominal pressure (MPa): 1.6 ● Seal test(water): 1.8MPa ● Shell test(water): 2.4MPa ● Suitable temperature: 0~80℃ ● Suitable medium: water

Main parts and materials



Part Name	Material
Body	Ductile Iron
Stem	2Cr13
Micro Strainer	Copper Alloy
Bonnet	Ductile Iron
Needle	Copper Alloy
Pilot	Assembly Part
Ball	Copper Alloy

Dimensions

DN	L	D	D1	D2	N-Φd	b	f
40	205	150	110	85	4-Φ18	18	3
50	205	165	125	100	4-Φ18	20	3
65	216	185	145	120	4-Φ18	20	3
80	240	200	160	135	8-Φ18	20	3
100	280	220	180	155	8-Φ18	22	3
125	330	250	210	185	8-Φ18	22	3
150	360	285	240	210	8-Φ23	24	3
200	420	340	295	265	12-Φ23	24	3

YUANDA product specifications in this catalogue are provided for reference only.
YUANDA has the right to change or modify product design, construction, specification or materials.

500X Pressure Relief Valve



Specifications



Basic standard
Flange end: BS4504
Feature
- Normal pressure (MPa): 1.6 - Seal test(water): 1.8 MPa - Shell test(water): 2.4MPa - Suitable temperature: 0~80 °C - Suitable medium: water

Main parts and materials


Part Name	Material
Body	Ductile Iron
Bonnet	Ductile Iron
Stem	2Cr13
Disc	Ductile Iron
Ball Valve	Brass/304
Pressure Relief Valve	Brass/304
Needle Valve	Brass/304

Dimensions

DN	L	Φ	Φ1	Φ2	N×Φ3
50	203	99	125	165	4×Φ19
65	216	118	145	185	4×Φ19
80	241	132	160	200	8×Φ19
100	292	156	180	220	8×Φ19
125	330	184	210	250	8×Φ19
150	356	211	240	285	8×Φ23
200	458	266	295	340	12×Φ23
250	530	319	355	405	12×Φ28

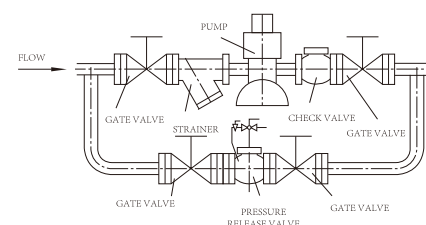

700X Water Pump Control Valve



Specifications

Basic standard
Flange end: BS4504
Feature
- Normal pressure (MPa): 1.6 - Seal test(water): 1.8 MPa - Shell test(water): 2.4MPa - Suitable temperature: 0~80 °C - Suitable medium: water



Main parts and materials

Part Name	Material
Body	Ductile Iron
Bonnet	Ductile Iron
Stem	2Cr13
Rubber Gasket	NBR
Disc	Ductile Iron
Ball	Brass
Needle	Brass
Strainer	Brass

Dimensions

DN	L	Φ	Φ1	Φ2	N×Φ3
50	205	165	125	100	4-18
65	216	185	145	120	4-18
80	240	200	160	135	8-18
100	280	220	180	155	8-18
125	330	250	210	185	8-18
150	355	285	240	210	8-22
200	420	340	295	265	12-22
250	500	405	355	320	12-26
300	530	460	410	375	12-26
350	610	520	470	436	16-26
400	700	580	523	485	16-23
450	745	640	585	545	20-30
500	810	715	650	608	20-34
600	920	840	770	718	20-36
700	1195	910	840	788	24-36

600X Hydraulic Electric Control Valve



Specifications


Basic standard
Flange end: BS4504
Feature
- Normal pressure (MPa): 1.6 - Seal test(water): 1.8 MPa - Shell test(water): 2.4MPa - Suitable temperature: 0~80 °C - Suitable medium: water

Main parts and materials




Part Name	Material
Body	Ductile Iron
Bonnet	Ductile Iron
Stem	2Cr13
Disc	Ductile Iron
Rubber Gasket	30%NR
Ball Valve	Brass/304
Needle Valve	Brass/304

Dimensions

DN	L	Φ	Φ1	Φ2	N×Φ3
50	203	99	125	165	4×Φ19
65	216	118	145	185	4×Φ19
80	241	132	160	200	8×Φ19
100	292	156	180	220	8×Φ19
125	330	184	210	250	8×Φ19
150	356	211	240	285	8×Φ23
200	458	266	295	340	12×Φ23
250	530	319	355	405	12×Φ28

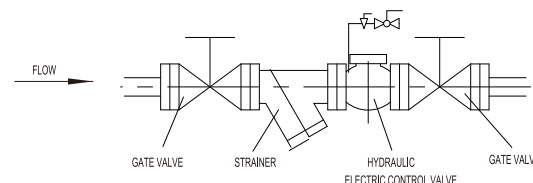

800X Differential Pressure Bypass Balancing Valve



Specifications

Basic standard
Flange end: BS4504
Feature
- Normal pressure (MPa): 1.6 - Seal test(water): 1.8 MPa - Shell test(water): 2.4MPa - Suitable temperature: 0~80 °C - Suitable medium: water

Main parts and materials

Part Name	Material
Body	Ductile Iron
Bonnet	Ductile Iron
Stem	2Cr13
Disc	Ductile Iron
Rubber Gasket	30%NR
Ball Valve	Brass/304
Needle Valve	Brass/304

Dimensions

DN	L	Φ	Φ1	Φ2	N×Φ3
50	203	99	125	165	4×Φ19
65	216	118	145	185	4×Φ19
80	241	132	160	200	8×Φ19
100	292	156	180	220	8×Φ19
125	330	184	210	250	8×Φ19
150	356	211	240	285	8×Φ23
200	458	266	295	340	12×Φ23
250	530	319	355	405	12×Φ28

YUANDA product specifications in this catalogue are provided for reference only.
YUANDA has the right to change or modify product design, construction, specification or materials.

YUANDA product specifications in this catalogue are provided for reference only.
YUANDA has the right to change or modify product design, construction, specification or materials.